


STRAIGHT LINEAR FUSING PRESS HP-90LD•90LD-II

FEATURES

- This is a continuous type machine therefore production is greatly increased.
- The automatic Belt Warping Prevention Device keeps both the upper and lower belts in the same position. Using the feed back system, damage is prevented. (Patent Pending)
- Using the electronic thermostat and the SSR, the temperature difference's range is kept at $\pm 3^{\circ}\text{C}$. The SSR's electronic parts have no contact points making for durability.
- Various stackers can be used with this machine.
- This machine has a front conveyor belt which greatly increases production levels.
- The Rotary Strip Off Device can be attached as optional equipment.
- By pushing the heater control switch the temperature of the upper and lower or front and rear heaters can be easily controlled. This means various materials can be used safely.
- The pressure roller is covered by a layer of silicon rubber. A double roller pressure system is used therefore from 0-4kg/cm uniform pressure is ensured. The upper and lower pressure rollers are completely separated when the pressure is set at 0.
- The heating plate is covered with special hard alumite, making it durable. The exchange of belts is very easy.
- The Belt Stopping Device stops the belt automatically if the belt warps therefore protecting the belt.
- The entrance of the lead in point can be adjusted easily according to the thickness of the material and interlining being used.
- An anti puckering roller is installed in this machine. This roller's position can be adjusted.
- Wing tables can be attached to the work table.

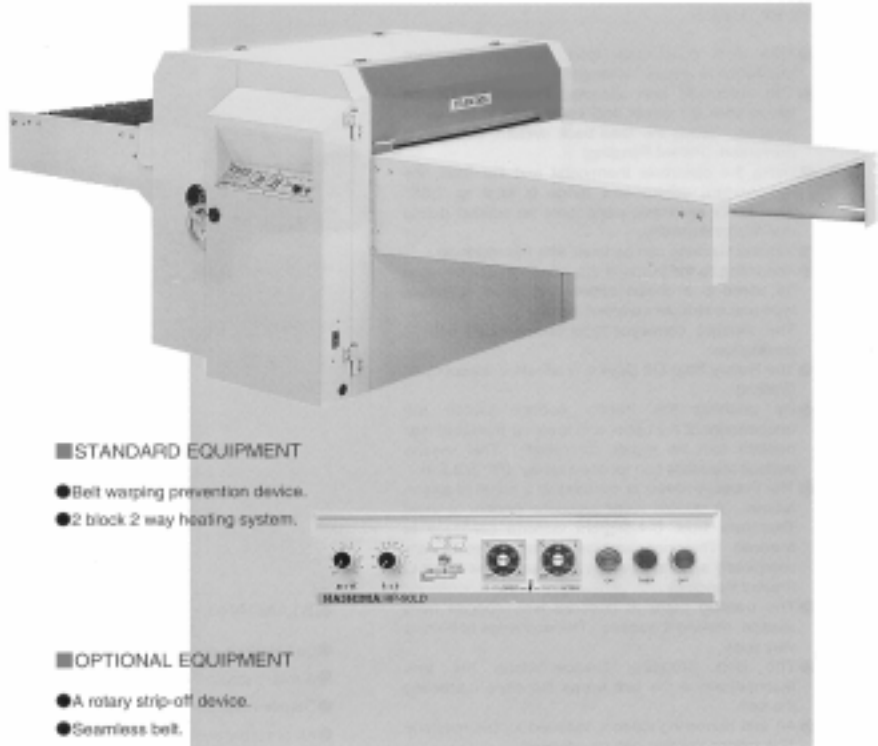

STANDARD EQUIPMENT

- Belt warping prevention device.
- 2 block 2 way heating system.


OPTIONAL EQUIPMENT

- A rotary strip-off device.
- Seamless belt.
- Stacker.



SPECIFICATIONS

| MODEL | HP-90LD | HP-90LD-II |
|------------------|------------------------------|---------------------|
| POWER SUPPLY | Three phase | Three phase |
| RATED OUTPUT | HEATER | 0.5kw |
| | MOTOR | 240W - 40W |
| FUSING WIDTH | 900mm | 900mm |
| MAX. BELT SPEED | 10.2m/min. | 10.2m/min. |
| MAX. PRESSURE | 4kg/cm | 4kg/cm |
| MAX. TEMPERATURE | 200°C | 250°C |
| HEATING TIME | 5~30sec. | 5~30sec. |
| DIMENSIONS | STRAIGHT 1,200×1,455×3,300mm | 1,200×1,455×3,300mm |
| | RETURN 1,200×1,455×2,300mm | |
| WEIGHT | 450kg | 480kg |

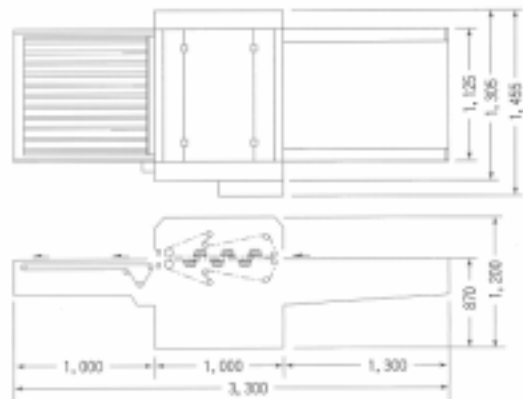

SEICKEL & SONS INC.

MANUFACTURERS & REBUILDERS OF STEAM PRESSING EQUIPMENT

360 ELIZABETH AVE., NEWARK, NJ 07112 TEL.973-242-1948 FAX 973-733-4956
 315 WEST 36TH ST., SUITE 504, NY, NY 10018 TEL.212-290-2120 FAX 212-290-2140
 TOLL FREE IN U.S. 1-800-338-5044

WEB WWW.SEICKEL.COM

SALES@SEICKEL.COM