

HP-220J-JS



■CHECK POINTS

- It is suitable for fusing like a front-body part to be designed one side opened.
- Belt warp prevention device is equipped on this series so that belt do not need to be hemmed, and the material do not get any mark of belts hem.
- Rotary strip-off device is equipped on JS type as standard.
- Increases thermal efficiency and prevent from puckering and roller-morire by devid heater.
- The may-pressure is creased to 1.5kg.


■OPTIONAL EQUIPMENT

- Optional table
- Stacker
- Return device.

■SPECIFICATIONS

MODEL	HP-220J(JS)	HP-330J(JS)	HP-450J(JS)	
POWER SUPPLY	single or Three phase	single or Three phase	single or Three phase	
RATED OUTPUT	HEATER	2kw	3kw	4kw
	MOTER	25W	25W	25W
TEMPERATURE (MAX)	200°C	200°C	200°C	
PRESSURE (MAX)	1.5kg/cm	1.5kg/cm	1.5kg/cm	
BELT SPEED (MAX)	8.7m/min	8.7m/min	8.7m/min	
HEATING TIME	5~20/sec	5~20/sec	5~20/sec	
FUSING WIDTH	220mm	330mm	450mm	
NET WEIGHT	110kg	120kg	140kg	

OPTION:seamless belt

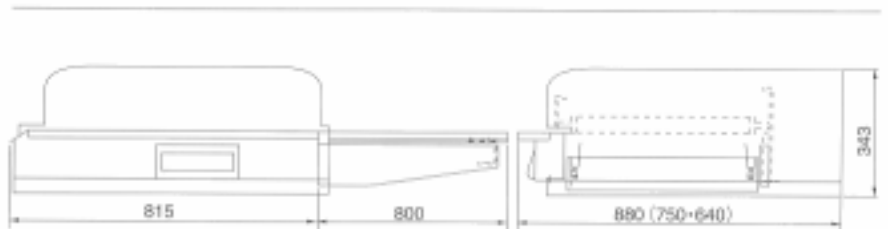

SEICKEL & SONS INC.

MANUFACTURERS & REBUILDERS OF STEAM PRESSING EQUIPMENT

360 ELIZABETH AVE., NEWARK, NJ 07112 TEL.973-242-1948 FAX 973-733-4956
 315 WEST 36TH ST., SUITE 504, NY, NY 10018 TEL.212-290-2120 FAX 212-290-2140
 TOLL FREE IN U.S. 1-800-338-5044

WEB WWW.SEICKEL.COM

SALES@SEICKEL.COM