

LATTNER

Blowdown Separators

Durable, Dependable Separators


$\frac{3}{4}$ " to 2 $\frac{1}{2}$ " Blow-Off Valve Size

Durable ASME CODE steam boiler blowdown separators safely reduce steam pressure for external venting...reduction to a maximum of 5 psi. Water is drained through the bottom threaded coupling; steam is safely vented out the top to the atmosphere. All joints and seams are welded and hydrostatically tested. Constructed of heavy duty $\frac{1}{4}$ " or $\frac{5}{16}$ " thick steel. Seven models up to 150 psi are available.

- **National Board Stamped**
- **ASME CODE up to 150 psi 650° F**
- **Plus a reasonable one year warranty, backed by over 75 years of responsible customer service.**

Blowdown Separators

Model	ASME Pressure	NPT NIPPLE		NPT CPLG	ALL DIMENSIONS IN INCHES					Ship Wt. Lb.		
		A Inlet	B Vent	D Drain	E Dia.	F Oa.Ht.	G	H				
87	150 P.S.I.	$\frac{3}{4}$ "	2"	2"	$8\frac{5}{8}$ "	18"	$8\frac{1}{2}$ "	1"	45			
810		1"										
1410		1"	3"									
1425		$1\frac{1}{4}$ "										
1450	125 P.S.I.	$1\frac{1}{2}$ "	4"	3"	16"	31"	18"	3"	255			
1600		2"										
1800		$2\frac{1}{2}$ "	6"	18"						38"	$22\frac{1}{2}$ "	290

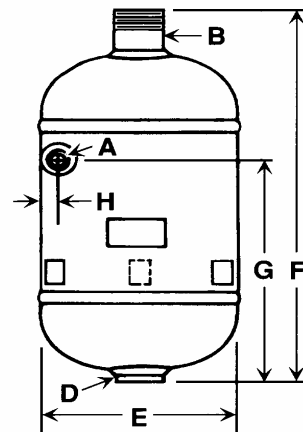

SEICKEL & SONS INC.

MANUFACTURERS & REBUILDERS OF STEAM PRESSING EQUIPMENT

360 ELIZABETH AVE., NEWARK, NJ 07112 TEL.973-242-1948 FAX 973-733-4956
 315 WEST 36TH ST., SUITE 504, NY, NY 10018 TEL.212-290-2120 FAX 212-290-2140
 TOLL FREE IN U.S. 1-800-338-5044

WEB WWW.SEICKEL.COM

SALES@SEICKEL.COM