

Cissell Moist-Rite Finishing Cabinet

Simple, easy-to-use pushbutton control assures trouble-free operation of the Cissell Moist-Rite Finishing Cabinet




- Time Cycle Ranges: STEAMING — 0-90 seconds; 30 seconds normal (rated) setting. CONDITIONING — 0-90 seconds; 30 seconds normal (rated) setting. DRYING — 0-180 seconds; 90 seconds normal (rated) setting.
- Provides wetter steam — no water spotting with specially designed injection nozzles.
- Power-On/Off Switch.
- Steaming Time Control; light on during steaming cycle.
- Conditioning Time Control; light on during conditioning cycle.
- Drying Time Control; light on during drying cycle.
- "Ready" Light glows when cycle is completed.
- Moist/Dry Steam Switch.
- Manual/Automatic Switch — in "Manual" position, provides continuous air for drying heavy garments. For normal operation, switch is set on automatic.
- (Optional) Buzzer denotes end of cycle.
- (Optional) Cycle Counter.



Control panel swings out for easy access, rapid maintenance.

Accessibility of control panel permits operator to change settings if necessary. Operation begins as soon as "Start" pushbutton is activated.

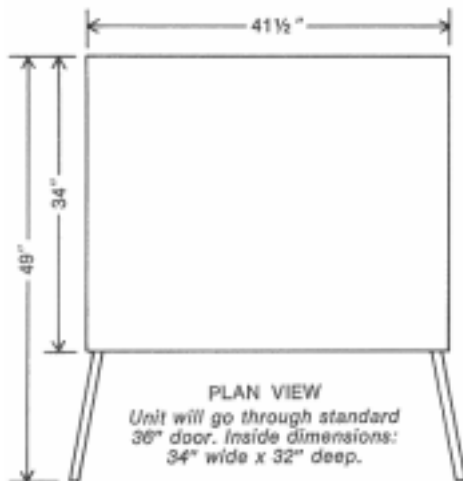

SPECIFICATIONS

ELECTRICAL	4 amps, 220 volts, 50 cycle, single phase; or 8 amps, 115 volts, 60 cycle, single phase
EXHAUST DUCT	4" diameter with adjustable damper for variable stack lengths
STEAM SUPPLY LINE	1/2"
STEAM RETURN LINE	1/2"
AIR DISPLACEMENT	200-250 C.F.M.
BOILER HORSEPOWER	2.0 100 P.S.I.G. Max.
FLOOR SPACE	34" deep, 41 1/2" wide, 83" high
NET WEIGHT	580 lbs. (Appx)
DOMESTIC SHIPPING WEIGHT	655 lbs. (Appx)
EXPORT SHIPPING DIMENSIONS	45" x 40" x 86" (Appx)
EXPORT SHIPPING WEIGHT	655 lbs. (Appx) Container Shipment 875 lbs. (Appx) Wood Box
CUBIC FEET EXPORT CRATING	88.6

When ordering, specify voltage and current

SEICKEL & SONS INC.

MANUFACTURERS & REBUILDERS OF STEAM PRESSING EQUIPMENT

360 ELIZABETH AVE., NEWARK, NJ 07112 TEL. 973-242-1948 FAX 973-733-4956
315 WEST 36TH ST., SUITE 504, NY, NY 10018 TEL. 212-290-2120 FAX 212-290-2140

TOLL FREE IN U.S. 1-800-338-5044

WEB WWW.SEICKEL.COM

SALES@SEICKEL.COM